




Fineboring Tools

Tapered screw adjustment μ m-accurate adjustable

2 cutting edges \varnothing 10 - 19 mm
internal coolant

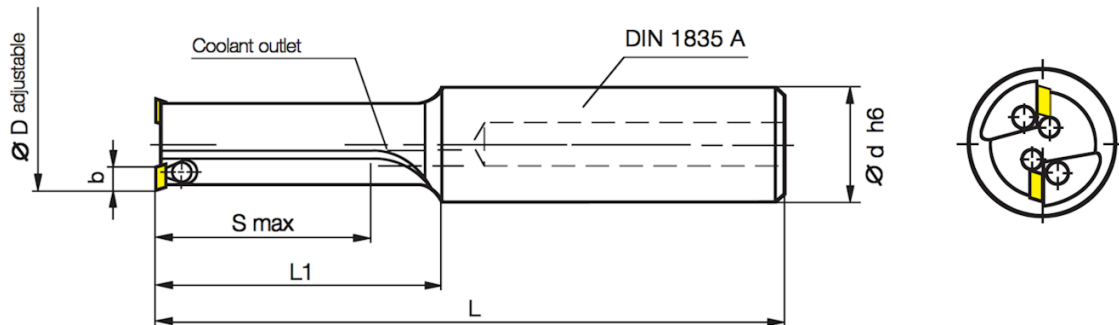

Part nr. 20012									
Code	Drawing nr.		b	\varnothing D	\varnothing d	S	L ₁	L	Inserts
10,200	H1730-1020 2516R	●	3	9.9 - 10.1	16	25	35	83	W1730-...L
			3.25	10.4 - 10.6	----->				W1733-...L
11,200	H1730-1120 2516R	●	3	10.9 - 11.1	16	25	35	83	W1730-...L
			3.25	11.4 - 11.6	----->				W1733-...L
12,200	H1730-1220 3016R	●	3	11.9 - 12.1	16	30	40	88	W1730-...L
			3.25	12.4 - 12.6	----->				W1733-...L
13,200	H1730-1320 3016R	●	3	12.9 - 13.1	16	30	40	88	W1730-...L
			3.25	13.4 - 13.6	----->				W1733-...L
14,200	H1730-1420 3516R	●	3	13.9 - 14.1	16	35	45	93	W1730-...L
			3.25	14.4 - 14.6	----->				W1733-...L
15,200	H2850-1520 3520R	●	5	14.7 - 15.3	20	35	45	95	W2850-...L
			5.25	15.2 - 15.8	----->				W2853-...L
16,200	H2850-1620 4020R	●	5	15.7 - 16.3	20	40	50	100	W2850-...L
			5.25	16.2 - 16.8	----->				W2853-...L
17,200	H2850-1720 4020R	●	5	16.7 - 17.3	20	40	50	100	W2850-...L
			5.25	17.2 - 17.8	----->				W2853-...L
18,200	H2850-1820 4520R	●	5	17.7 - 18.3	20	45	55	105	W2850-...L
			5.25	18.2 - 18.8	----->				W2853-...L
19,200	H2850-1920 4520R	●	5	18.7 - 19.3	20	45	55	105	W2850-...L
			5.25	19.2 - 19.8	----->				W2853-...L

● ex stock

We reserve the right to make technical changes.