





Fineboring Tools

Radial adjustment short version (1.5xD)

2 cutting edges Ø 10 - 44 mm
internal coolant, Shank DIN 1835 A

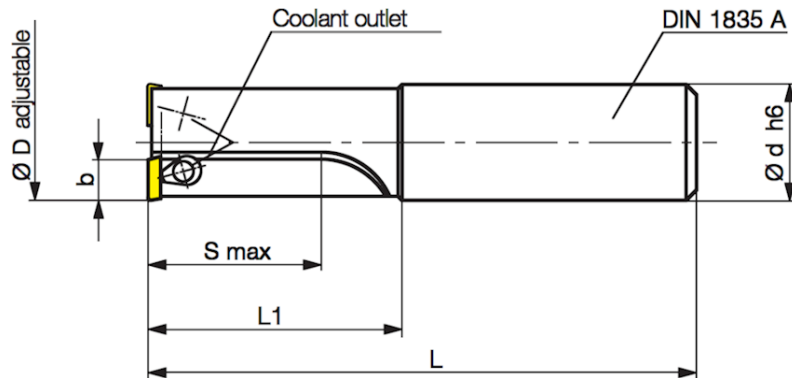

Part nr. 20024	Code	Drawing nr.		b	Ø D	Ø d	S	L ₁	L	Inserts
	10,000	H1035-1000 1516R	●	3.9	10 - 11	16	15	25	73	W1035-...L
	11,000	H1035-1100 1716R	●	3.9	11 - 12	16	17	27	75	I
	12,000	H1035-1200 1816R	●	3.9	12 - 13	16	18	28	76	I
	13,000	H1035-1300 1016R	●	3.9	13 - 14	16	20	30	78	↓
	14,000	H2850-1400 2116R	●	5	14 - 15	16	21	31	79	W2850-...L
	15,000	H2850-1500 2316R	●	5	15 - 16	16	23	33	81	I
	16,000	H2850-1600 2416R	●	5	16 - 17	16	24	34	82	I
	17,000	H2850-1700 2616R	●	5	17 - 18	16	26	36	84	I
	18,000	H2850-1800 2716R	●	5	18 - 19	16	27	37	85	I
	19,000	H2850-1900 2916R	●	5	19 - 20	16	29	39	87	↓
	20,000	H3570-2000 3020R	●	7	20 - 22	20	30	45	95	W3570-...L
	22,000	H3570-2200 3320R	●	7	22 - 24	20	33	48	98	I
	24,000	H3570-2400 3620R	●	7	24 - 26	20	36	51	101	↓
	26,000	H4090-2600 3925R	●	9	26 - 28	25	39	54	110	W4090-...L
	28,000	H4090-2800 4225R	●	9	28 - 30	25	42	57	113	I
	30,000	H4090-3000 4532R	●	9	30 - 32	32	45	63	123	I
	32,000	H4090-3200 4832R	●	9	32 - 34	20	48	66	126	I
	34,000	H4090-3400 5132R	●	9	34 - 36	32	51	69	129	I
	36,000	H4090-3600 5432R	●	9	36 - 38	32	54	72	132	I
	38,000	H4090-3800 5732R	●	9	38 - 40	32	57	75	135	I
	40,000	H4090-4000 5732R	●	9	40 - 42	32	60	77	138	I
	42,000	H4090-4200 5732R	●	9	42 - 44	32	63	80	141	↓

Tools in this series (1.5 x D) are optimal for the production of index bores and as pilot tools for multi-flute reamers.

● ex stock

We reserve the right to make technical changes.